


# Pilot UHT plant

## Data sheet



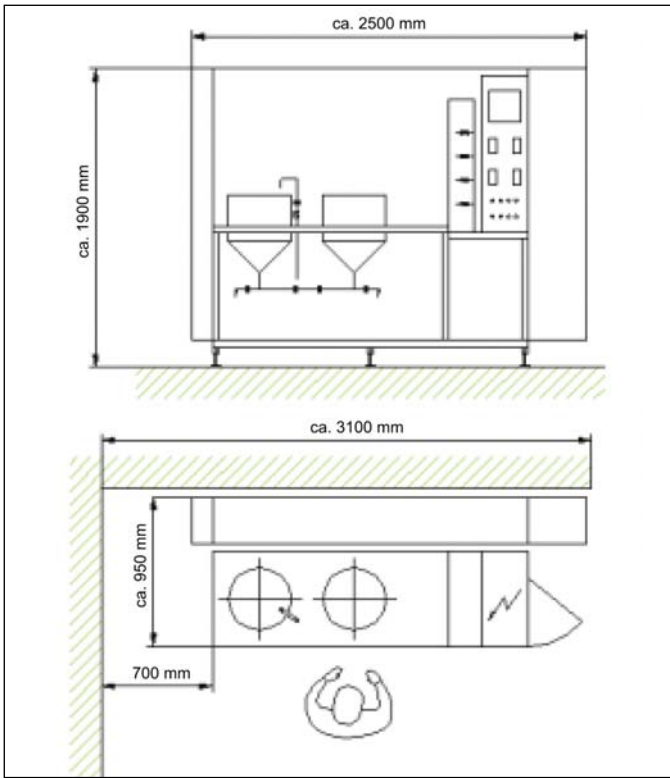

## Technical Data

**Capacity** 50 ... 300 l/h

**Products** fluid and viscous product


**Equipment**

- tubular heat exchanger
- indirect heating system
- 2 separate heating circuits
- variable heat holding times
- pre-assembled modular system
- operating data capture

**Options**

- direct heating system
- 2 balance tanks
- agitator for balance tank
- homogenizer
- sterile tank system, including CIP plant
- aseptic filling

Overview and dimensions

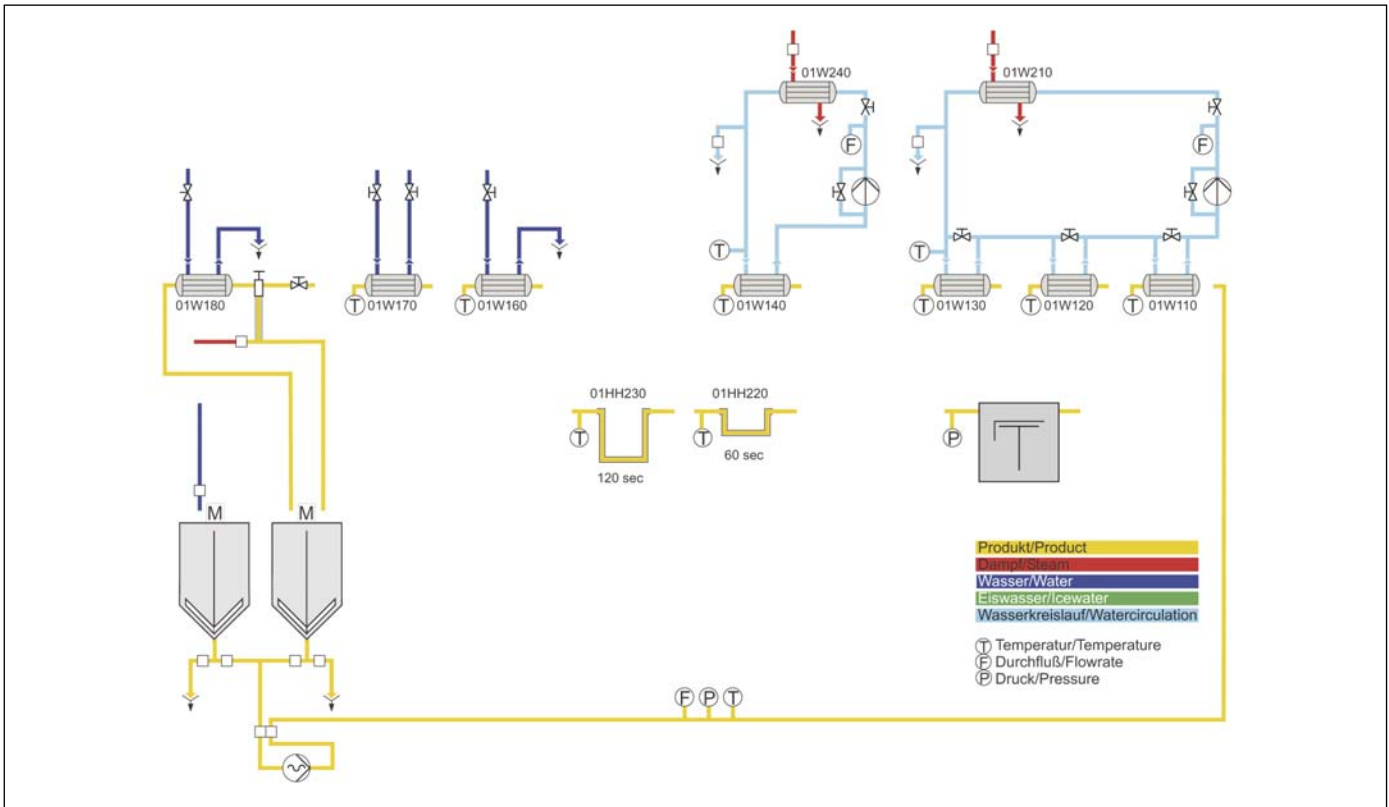

Block flow chart

**GEA** Tuchenhagen Dairy Systems

Process Engineering Division

A company of mg technologies group

Tuchenhagen Dairy Systems GmbH

Ahaus: Aseptic Center: Kruppstraße 3 · D-48683 Ahaus · Tel.: +49 - (0) 25 61 / 86 02-0 · Fax: +49 - (0) 25 61 / 86 02-130

[www.tuchenhagen.de](http://www.tuchenhagen.de)